





Baureihe F-CE



Typ F-CE		300/75	300/85	300/95	500/75	500/85	500/95
Traglast	kg	300	300	250	500	500	350
Bauhöhe	mm	70	70	70	70	70	70
Hubhöhe	mm	750	850	950	750	850	950
Nutzhub	mm	680	780	880	680	780	880
Plattformlänge	mm	1450	1600	1800	1450	1600	1800
Plattformbreite	mm	900	900	900	900	900	900
Eigengewicht	kg	220	240	250	220	240	250
Hub-, Senkzeit ca.	s	20	25	30	20	25	30
Motor	Volt	230/400	230/400	230/400	230/400	230/400	230/400
Leistung	kW	0,75/0,55	0,75/0,55	0,75/0,55	0,75/0,55	0,75/0,55	0,75/0,55
Keil (Zubehör)							

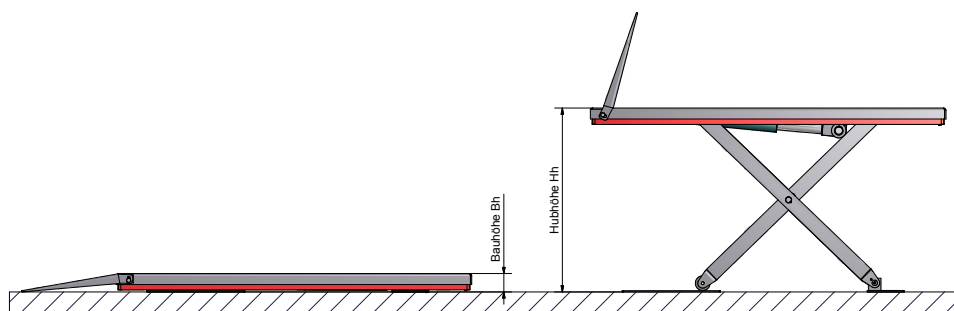

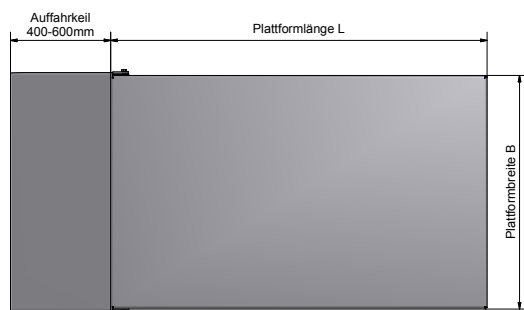

Baureihe F-CE



Typ F-CE		1000/75	1000/85	1000/95	1500/75	1500/85
Traglast	kg	1000	1000	850	1500	1500
Bauhöhe	mm	80	80	80	90	90
Hubhöhe	mm	750	850	950	750	850
Nutzhub	mm	670	770	870	660	760
Plattformlänge	mm	1450	1600	1800	1450	1600
Plattformbreite	mm	900	900	900	900	900
Eigengewicht	kg	270	290	310	350	370
Hub-, Senkzeit ca.	s	25	30	35	30	35
Motor	Volt	230/400	230/400	230/400	400	400
Leistung	kW	0,75/0,55	0,75/0,55	0,75/0,55	0,75	0,75
Keil (Zubehör)						

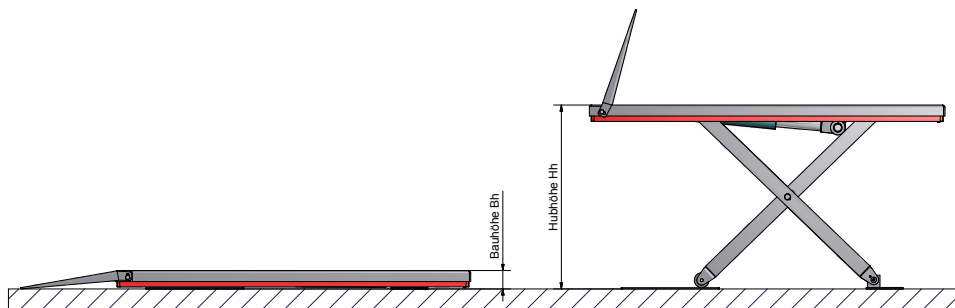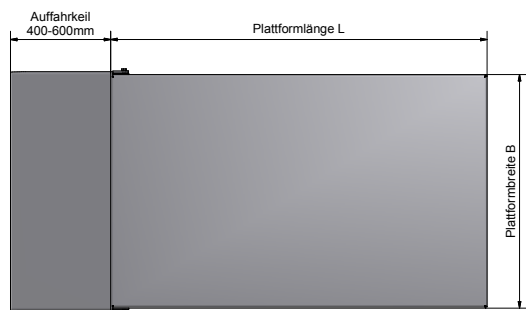



Baureihe F-CE

Typ F-CE		1500/95	2000/75	2000/85	2000/95	2500/75
Traglast	kg	1250	2000	2000	1500	2500
Bauhöhe	mm	90	90	90	90	120
Hubhöhe	mm	950	750	850	950	750
Nutzhub	mm	860	660	760	860	630
Plattformlänge	mm	1800	1450	1600	1800	1450
Plattformbreite	mm	900	900	900	900	1000
Eigengewicht	kg	390	350	370	390	420
Hub-, Senkzeit ca.	s	40	30	35	40	30
Motor	Volt	400	400	400	400	400
Leistung	kW	0,75	1,1	1,1	1,1	1,1
Keil (Zubehör)						

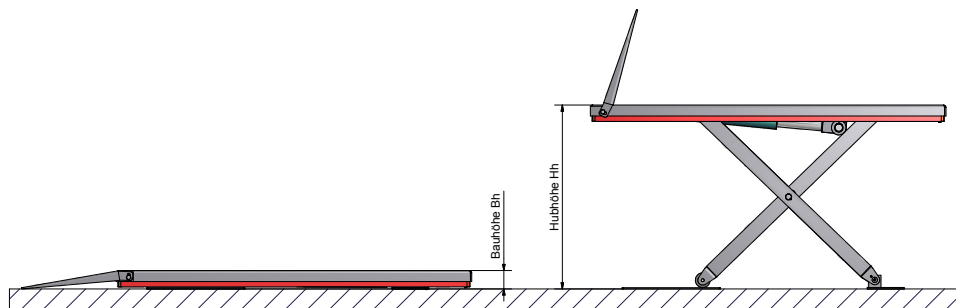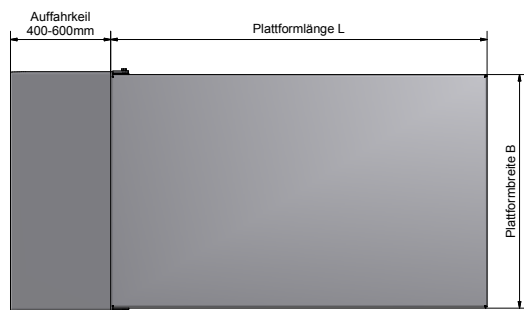



Baureihe F-CE

Typ F-CE 2500/85 2500/95

Traglast	kg	2500	2000
Bauhöhe	mm	120	1200
Hubhöhe	mm	850	950
Nutzhub	mm	730	830
Plattformlänge	mm	1600	1800
Plattformbreite	mm	1000	1000
Eigengewicht	kg	450	480
Hub-, Senkzeit ca.	s	35	40
Motor	Volt	400	400
Leistung	kW	1,1	1,1
Keil (Zubehör)			

